INSTALLATION INSTRUCTIONS

Model # 8990 READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

- 1. Shut off power at the circuit breaker (avertissement! couper le courant au niveau des fusibles ou du disjoncteur) and remove the old fixture including mounting hardware.
- 2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
- 3. Attach crossbar (B) (Part#A-012) using mounting screws (C) (Part#8/32"*1"L) to the outlet box (A). (Fig 1)

CONNECTION THE WIRES (Fig. 2)

4. Connect the electrical wires as shown in Fig.2.Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw (D) (Part#8/32"*1/3"L) provided.

FINISHING THE INSTALLATION (Fig.1)

- To prevent moisture from entering the outlet box (A) and causing a short, use clear silicone sealant to outline the outside of fixture back plate (G) where it meets the wall leaving a space at bottom to allow moisture a means to escape. (Fig 3)
- 6. Align back plate (G) onto nipple (E) and secure with cap nut (F) (Fig 1).
- 7. At this point, unscrew the screws (J&K), remove the top cover (I) with the top back plate (H) to install 1*100W A bulb in accordance with the fixture specification –DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NOTE: NO BULB INCLUDED) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)
- 8. Replace the top cover (I) with top back plate (H) and secure with the screws (J&K).


Your installation is now complete. Return power to the outlet box and test the fixture.


IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.






Fig. 1





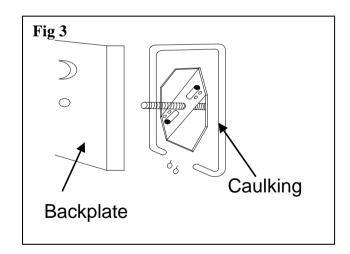

U.S. Patents No: D455,515; D455,856; This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws. © Minka Lighting Inc.

thegreatoutdoors®

Job Name:
Job Type:
Quantity:

Family:	Ardmore™
Product Category:	OUTDOOR LANTERN
Item#:	8990-61
Finish:	Vintage Rust™
Certification:	3187291



Lamping

Number of Bulbs:	1	
Light Type:	A19 MED	
Socket Type:	E26 MED	
Max Bulb Wattage:	100	
Bulbs Included:	0	
Color Temp:	0	
Photo Cell Included:	N/A	
Ballast:	N/A	
Dimmable:	Y	
Shipping		
Carton Weight:	12.71	
Carton Width:	9.63	
Carton Height:	23	
Carton Length:	14.13	
Carton Cubic Feet:	1.811	
Master Pack:	1	
Master Pack Weight:	N/A	
Master Pack Width:	N/A	
Master Pack Height:	N/A	
Master Pack Length:	N/A	
Master Cubic Feet:	N/A	
*Multi-Pack:	1	
Small Package Shippable:	Y	

^{*}For additional information, please contact Customer Care: 1-800-221-7977.

Measurements

เทษสงนายากเง	easurements		
Width:	7.5		
Height:	19.75		
Length:	N/A		
Min Overall Height:	0		
Max Overall Height:	0		
Height Adjustable:	N		
Extension:	12.25		
Net Weight:	6.61		
Back Plate/Canopy Width:	5.63		
Back Plate/Canopy Height:	14.38		
Canopy Length:	N/A		
Center to Top of Fixture:	8.63		
Center to Bottom of Fixture:	11		
Slope:	N		
Chain Length:	N/A		
Wire Length:	7		

Shade

*Shade Description:	Mouth Blown Clear
*Shade Material:	Hammered Glass
*Shade Quantity:	1
*Shade Number:	G8840-H
*Shade Width:	N/A
*Shade Height:	N/A
*Shade Length:	N/A

Miscellaneous

Wildowianoodo		
Safety Cable Included:	N	

Notes

Product depicted on this spec sheet is protected by United States Federal and/or State laws including US Patent, Trademark and/or Copyright and unfair competition laws. Unauthorized reproduction or use carries severe legal penalties.