


ASSEMBLY INSTRUCTION

F87051

1. FASTEN TUBE 3 ONTO THE BASE, FASTEN TUBE 2 ONTO TUBE 3.
 2. FASTEN TUBE 1 TO TUBE 2.
 3. FASTEN THE SOCKET ASSEMBLY ONTO TUBE 1, BE CAREFUL NOT TO TWIST THE POWER CORD AND TIGHTEN SECURELY.
 4. SCREW THE BULB INTO THE SOCKET, TYPE A MAX 150W (BULB NOT INCLUDED).
 5. PLACE THE HARP ONTO THE SADDLE.
 6. PLACE THE SHADE ONTO THE HARP AND TIGHTEN THE FINIAL.
- THE HARP/FINIAL ARE INCLUDED IN THE RED BAG OF THE BOX, PLS FIND THEM BEFORE THROWING THE PACKING MATERIALS AWAY.

IMPORTANT SAFETY INSTRUCTIONS

THIS PORTABLE LAMP HAS A POLARIZED PLUG (ONE BLADE IS WIDER THAN THE OTHER). AS A SAFETY FEATURE TO REDUCE THE RISK OF ELECTRIC SHOCK. THIS PLUG WILL FIT IN A POLARIZED OUTLET ONLY ONE WAY. IF THE PLUG DOES NOT FIT FULLY IN THE OUTLET, REVERSE THE PLUG. IF IT STILL DOES NOT FIT, CONTACT A QUALIFIED ELECTRICIAN. NEVER USE WITH AN EXTENSION CORD UNLESS PLUG CAN BE FULLY INSERTED. DO NOT ALTER THE PLUG.

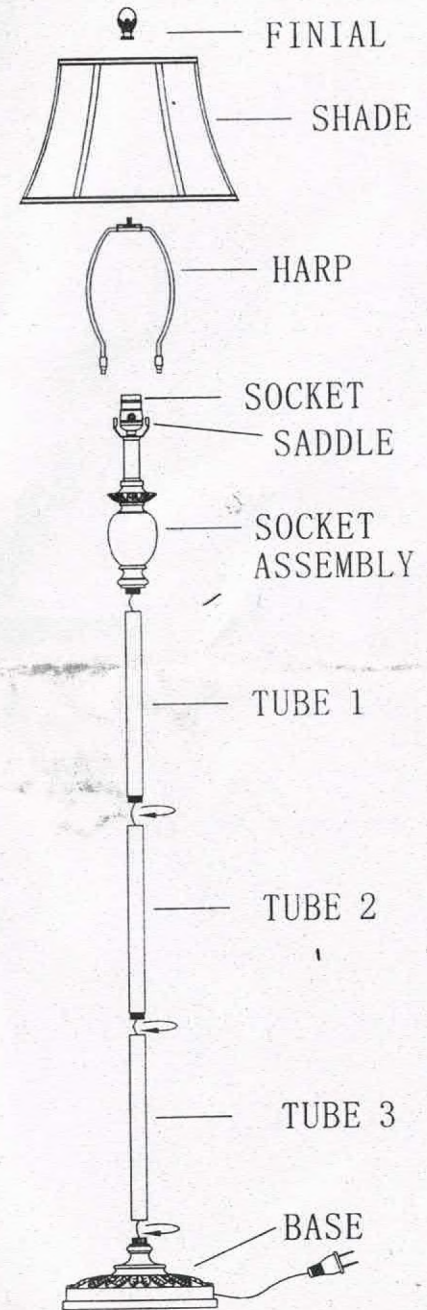


ALTERNATE SHADE SPECIFICATION

Critical Bulb-to-shade Spacing for Open Top / Open Bottom Shades

For your safety, follow the dimensions shown in the chart below.

WARNING

The recommended shades shown on the back of this lamp package are properly sized for use with this lamp. If an **Alternate Shade** is used, measurements must be checked according to the specifications below. Caution: Using an oversized shade may cause fixture to easily tip over.

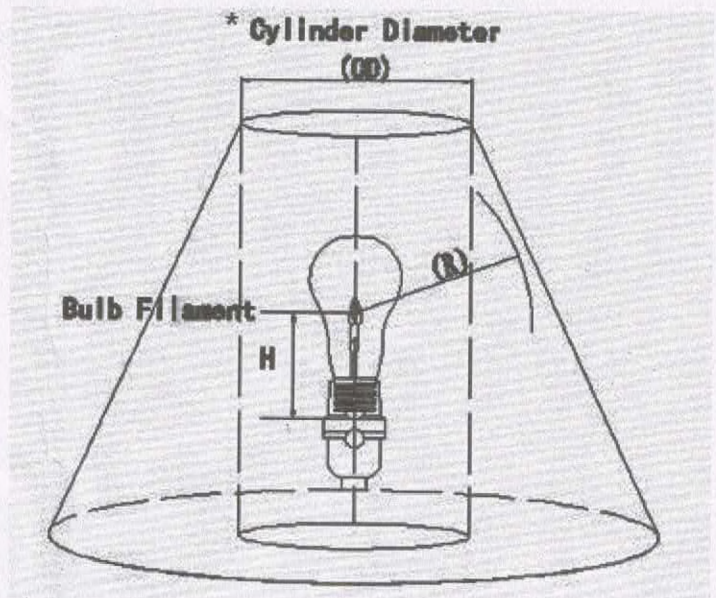

AT NO TIME SHOULD THE * CYLINDER DIAMETER (CD) AND **CRITICAL RADIUS (R) MEASUREMENTS OF YOUR ALTERNATE SHADE BE LESS THAN THE MEASUREMENTS NOTED BELOW, AS THIS MAY CAUSE A FIRE HAZARD

Lamp holder base size	Bulb	*(CD) Cylinder Diameter		**(R) Critical Radius		(H) Lamp centerline length			
		Wattage	Type	Inches	(mm)	Inches	(mm)	Inches	(mm)
	Medium 25W	A	3	3.5	(76.2)	1-5/8	(41.3)	2-3/4	(69.8)
	Medium 40W	A				2	(50.8)	3-1/4	(82.5)
	Medium 60W	A	3.5	(88.9)	2-1/2	(63.5)	3-1/4	(82.5)	
	Medium 75W	A	3.5	(88.9)	2-7/8	(73.0)	3-1/4	(82.5)	
	Medium 100W	A	4	(101.6)	3-1/2	(88.9)	3-1/4	(82.5)	
	Medium 150W	A	4.5	(114.3)	4-3/4	(120.7)	3-1/4	(82.5)	
	Candelabra 25W	B	3	(76.2)	1-5/8	(41.3)	2	(50.8)	
	Candelabra 40W	B	3.5	(88.9)	2	(50.8)	2	(50.8)	
	Candelabra 60W	B	3.5	(88.9)	2-1/2	(63.5)	2	(50.8)	

Terminology

*CD= Cylinder Diameter

The minimum diameter of a cylinder, as determined by the bulb wattage in the Chart, which must be able to pass through the openings in the top and bottom of the shade.

**r ⇐ Critical Radius

The critical radius is the minimum allowable horizontal distance from the center point of the bulb filament to either side of the shade (see diagram).

Installation fo Leveling kit:

After you have fully assembled your lamp and find out that it is leaning toward a certain angla you can level it using these simple steps:

1. Peel off adhesive on the round cushion, and attach it on the area that wobbles or needs added height
2. Depending on how high or low you want the lamp leveled, you can sfack the cushion pads togethiar to achieve required balance.

