

SEMI-FLUSH FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code (N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Screw the HEX NUT to the NIPPLE, then attached the COVER, CAP, COVER-1, TUBE, COVER-2 and HEX NUT to the NIPPLE one by one, by fixuping with LOOP.
2. Put the FRAME to the fixture, then screw the NIPPLE to the HEX COMMECTOR with HEX NUT, threading the BOTTOM CAP, HEX NUT to the NIPPLE by screwing with the FINIAL.
3. Attach the CROSS BAR to the OUTLET BOX by screwing with two MOUNTING SCREWS.
4. Make wire connections:
 - WHITE WIRE from fixture to WHITE WIRE from power source.
 - BLACK WIRE from fixture to BLACK WIRE from power source.
 - Loop the GROUND WIRE to CROSS BAR with a GROUND SCREW.
4. Place the CANOPY over the OUTLET BOX by threading with TOP LOOP and TOP NUT.

INSTALLATION IS NOW COMPLETED.

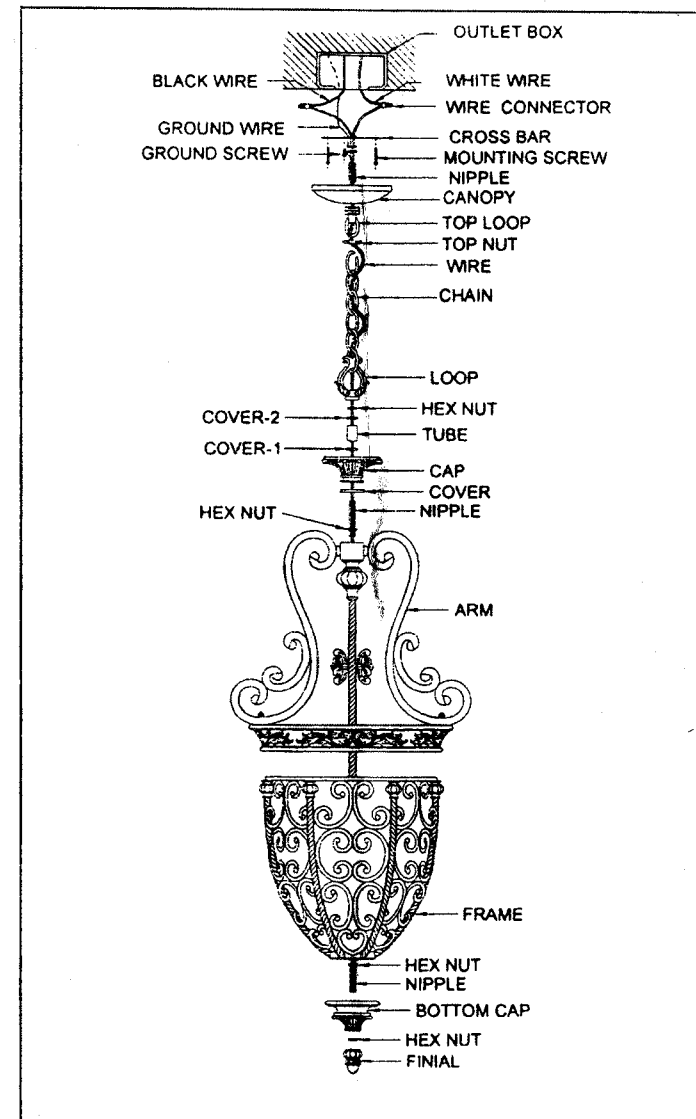

FOR ITEM# 03324&03371