


ASSEMBLY INSTRUCTIONS (English)

SKU: 38280

SKU: 49303

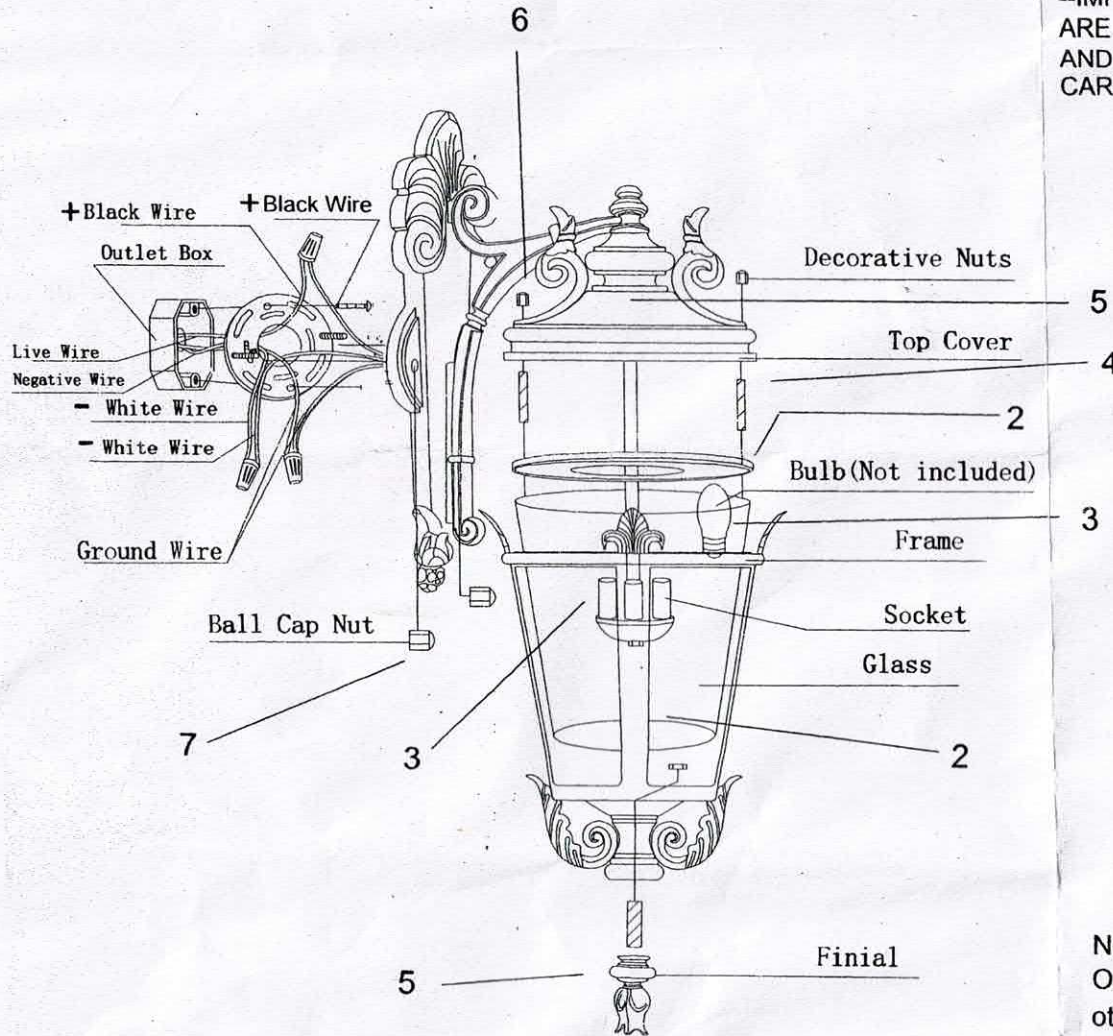

IMPORTANT

- ALL ELECTRICAL CONNECTION MUST BE IN ACCORDANCE WITH LOCAL CODES, ORDINANCES OR NATIONAL ELECTRICAL CODES. IF YOU ARE UNFAMILIAR WITH QUALIFIED ELEDTRICIAN.
- BEFORE STARTING INSTALLATION, DISCONNECT THE POWER BYTURNING OFF THE CIRCUIT BREAKER OR BY REMOVING THE FUSE AT THE FUSE BOX.
- IMPORTANT SAFEGUARDS AND INSTRUCTIONS APPEARING ON THIS SHEET ARE NOT MEANT TO COVER ALL POSSIBLE CONDITIONS AND SITUATIONS, AND CARE ARE FACTORS WHICH MUST BE SUPPLIED BY THE PERSON(S) CARING FOR AND OPERATION THE UNIT.

1. Carefully unpack and identify all parts.
2. Put the rubber gasket on the top and bottom of the galss, then put the glass in the frame:
3. Put the drivepipe in the socket then screw the bulb in it.
4. Fix the thread onto the metal frame.
5. Screw the final on the bottom of the frame and put the cover on the frame.
6. Screw the top cover with two decorative nuts.
7. Screw the whole lamp with two decorative nuts.
8. Make wire connection: Refer to chart below for correct connection. Wire supply wires to fixture wires accordingly.

| Connect Black or Supply Wire to: | Connect White Supply Wire to : |
|---|--|
| Black Fixtuner Wire or *parallel cord (Round & smooth) | White Dixture Wire or *parallel cord (Square & Ridged) |
| Clear, Brown, Glod or Black Without tracer | Clear, Brown, Glod or Black Without tracer |
| Insulated wire (Other than green) With copper Conductor | Insulated wire (Other than green) |

Note: when parallel wire (SPT1&SPT2), is used. One wire is square shaped or ridged and the other wire will be round is smooth (See Illustration)

