


## INSTALLATION INSTRUCTIONS

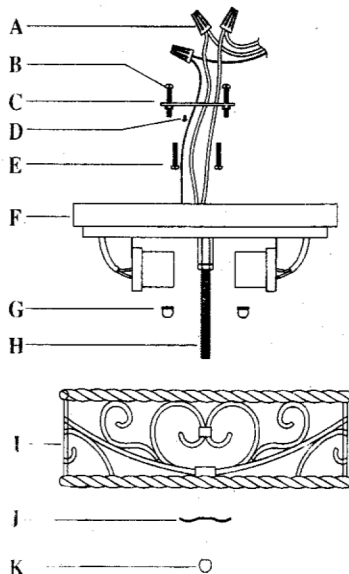

### Parts:

- |                           |                    |
|---------------------------|--------------------|
| A: Wire connector         | B: Mounting screws |
| C: Mounting plate         | D: Ground screw    |
| E: Outlet box screws      | F: Sconce plate    |
| G: Mounting screws finial | H: Center pipe     |
| I: Mica component         | J: Rosette         |
| K: Ball finial            |                    |

### Steps:

- 1) SHUT OFF MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX / CIRCUIT BREAKER.
- 2) Gently pull the wiring out of the wall outlet box and allow the wires to hang. Pull the wires through the center hole in the mounting plate(C).
- 3) Connect the neutral (white) fixture wire to the neutral (white) outlet wire. Fasten together with a wire connector(A). Repeat this procedure with the hot (black)wire. Always make sure that no wire strands are left outside of connectors. Then twist the fixture's ground wire and the outlet box's ground wire together by the wire connector.
- 4) Once wiring is complete, attach the mounting plate(C) to the outlet box using the Outlet box screws(D) .
- 5) Attach the Sconce plate(E) to the mounting plate(C) with the two Mounting screw finial(F) tightly.
- 6) Adjust Center pipe (H) at a desired height.
- 7) Place Mica component(H) and Rosette(I) through the Center pipe(G), Secure with Ball finial(J) tightly.