


ASSEMBLY INSTRUCTION

1. Carefully remove all parts from package being careful not to damage any components. Please verify that all parts are present before discarding carton and packing materials.
2. Put the fixture on a smooth flat surface, place the component onto the fixture, then screw it with screws.
3. Hang the crystal dangles (A)(B) on the metal leaf using the following two steps:
 - I Hang the end of metal hook through the hole on the metal leaf.
 - II Close the end of metal hook together if needed.
4. Hang the long crystal dangles (C) on finial using the following two steps:
 - I Hang the end of metal hook through the small hoop on the finial.
 - II Close the end of metal hook together if needed.
5. After finishing the above steps, please consult a qualified electrician for installation.

REMARK: 2pcs spare parts for crystal (A)
 2pcs spare parts for crystal (B)
 2pcs spare parts for crystal (C)

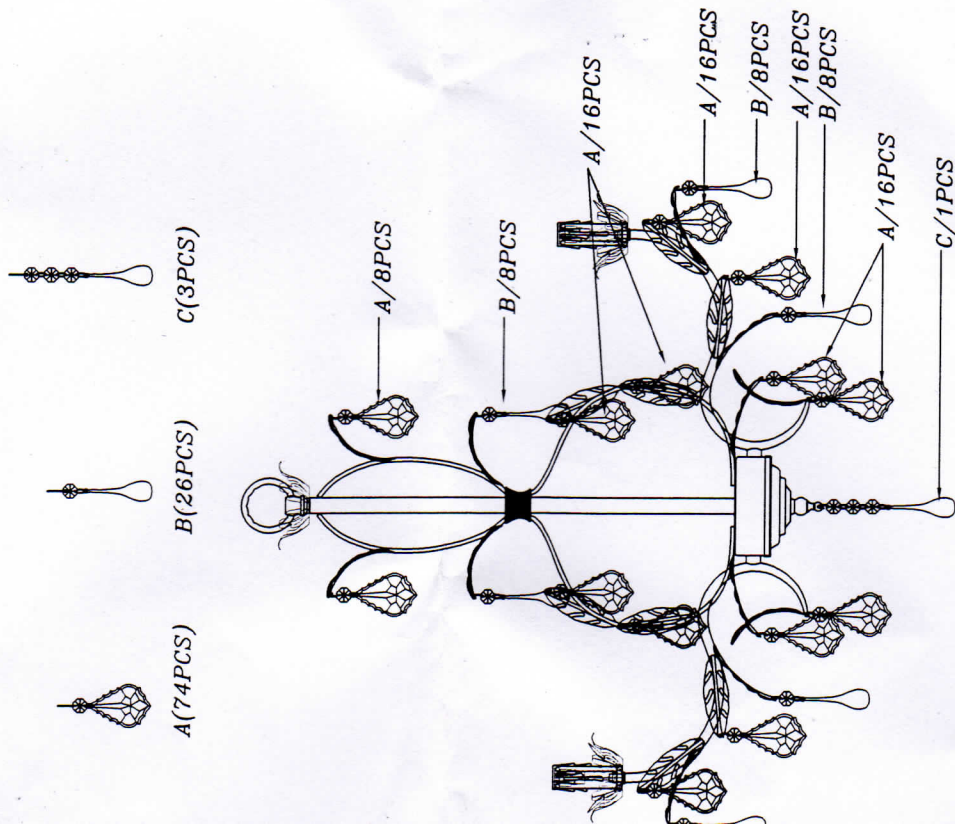

INSTALLATION INSTRUCTIONS

WE RECOMMEND THAT A QUALIFIED ELECTRICIAN INSTALL THIS FIXTURE.

THIS INSTALLATION MEETS ALL APPLICABLE STATE AND LOCAL CODES.GENERAL:

1. TO ENSURE THE SUCCESS OF THE INSTALLATION BE SURE TO READ THESE INSTRUCTIONS THOROUGHLY BEFORE STARTING.
2. THIS FIXTURE IS TO BE MOUNTED TO AN APPROVED OUTLET BOX THAT IS DIRECTLY SUPPORTED BY THE BUILDING STRUCTURE.

CAUTION:

TO AVOID ELECTRICAL SHOCK, MAKE SURE THAT THE ELECTRICITY IS SHUT OFF AT THE MAIN PANEL BEFORE WIRING, ALL WIRING MUST BE IN ACCORDANCE WITH STATE AND LOCAL WIRING CODES.

- 1) Carefully remove all parts from package being careful not to damage any components. Please verify that all parts are present before discarding carton and packing materials.
- 2) Put the fixture (9) on a smooth flat surface and screw the top ring (8) on it.
- 3) Open up one end of "C" loop by turning the small threaded collar (11) and attach one end of the chain (7) to the "C" loop and to top ring (8). Make sure to close the collar portion of the "C" loop. Carefully feed the supply wire and ground wire up through the chain every three inch.

- 4) Twist the fixture's ground wire and the outlet box's ground wire together by the wire connector. Connect the neutral(the ribbed one) fixture wire to the neutral(the ribbed one) outlet wire. Fasten together with a wire connector (1). Repeat this procedure with the hot(the smooth one) wire. Always make sure that no wire strands are left outside of connectors.

- 5) Attach the mounting bracket (3) to the outlet box, by using the slotted holes on the mounting bracket (3) and mounting screws (2).

- 6) Slide the canopy (5) up the chain (7) and place the canopy (5) over the outlet box, and secure it with the threaded ring (6).

- 7) Screw the light bulbs (10) (not included) in each socket.

- 8) Hang the drops on the lamp body.

04-3616-SD300-20 (87551)

Page 2/2

