

## Assemble instruction sheet for lamps with harp

Many thanks of using our technical craft table lights which with good price and quality. Before you use it.


Please follow the assemble instruction sheet to install this lamp:

1. Assemble the bulb-Assemble the bulb that the wattage must comply with the wattage label marked, the bulb is not provided.

Do remember not to plug the lamp when you install the bulb.

2. Assemble the harp-Fix the ends of the harp A into the slot of the harp B.(SEE THE PICTURE)

3. Assemble the shade-Put the shade on the top of the harp, screw the finial. That is ok.

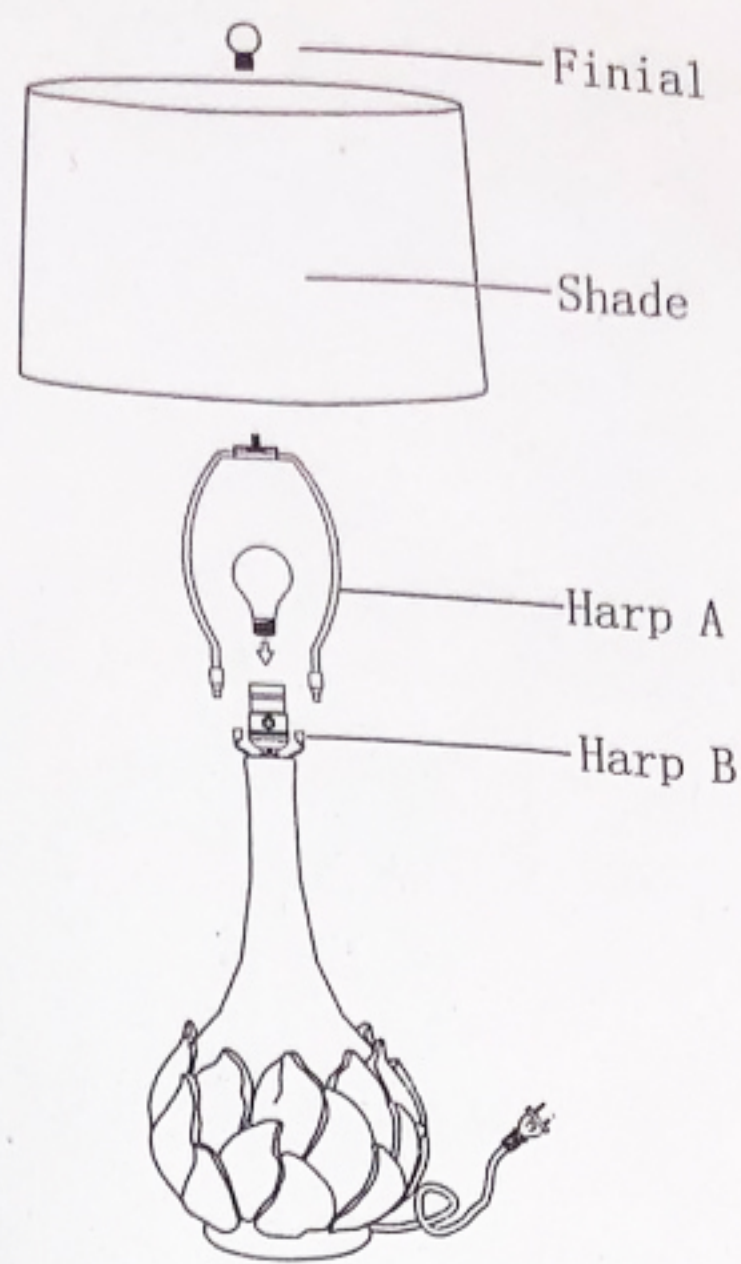


## ALTERNATE SHADE SPECIFICATION

Critical Bulb-to-shade Spacing for Open Top / Open Bottom Shades



For your safety, follow the dimensions shown in the chart below.

### \*\*WARNING\*\*

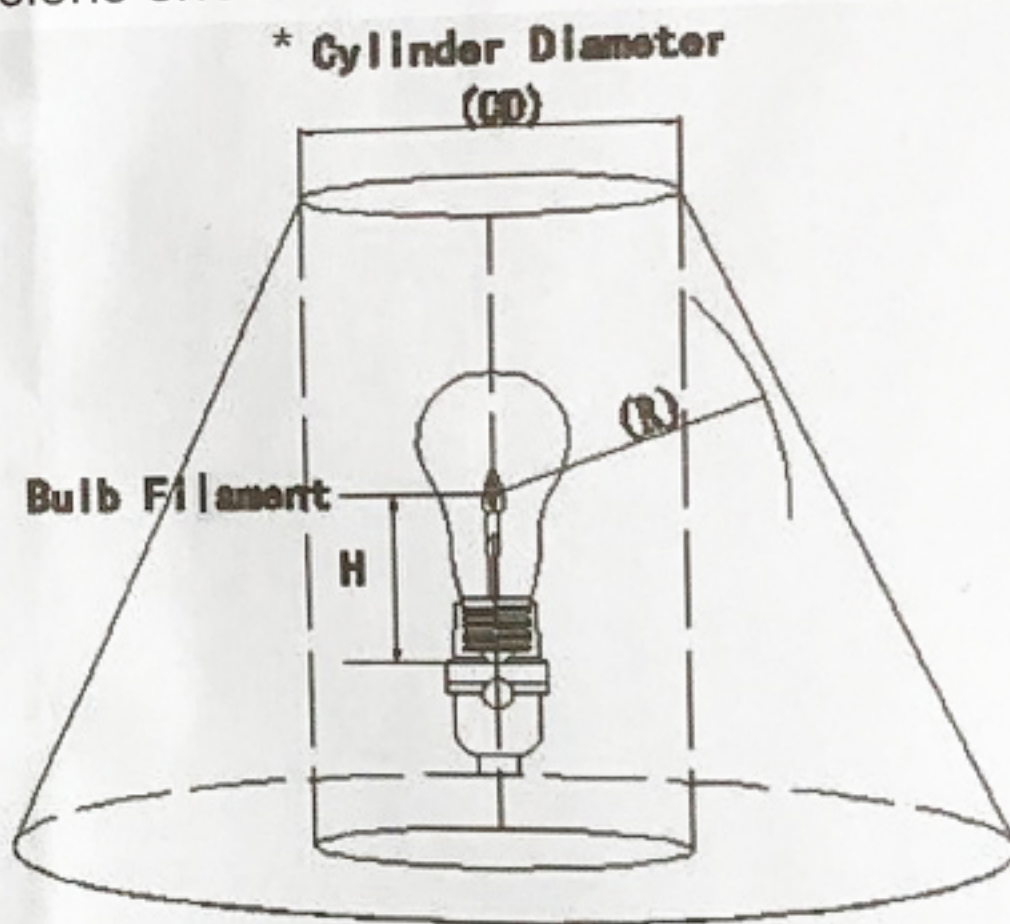The recommended shades shown on the back of this lamp package are properly sized for use with this lamp. If an **Alternate Shade** is used, measurements must be checked according to the specifications below. Caution: Using an oversized shade may cause fixture to easily tip over.



AT NO TIME SHOULD THE \* CYLINDER DIAMETER (CD) AND \*\*CRITICAL RADIUS (R) MEASUREMENTS OF YOUR ALTERNATE SHADE BE LESS THAN THE MEASUREMENTS NOTED BELOW, AS THIS MAY CAUSE A FIRE HAZARD

	Lamp holder base size	Bulb		*(CD)Cylinder Diameter		**(R) Critical Radius		(H)Lamp centerline length	
		Wattage	Type	Inches	(mm)	Inches	(mm)	Inches	(mm)
	Medium	25W	A	3	(76.2)	1-5/8	(41.3)	2-3/4	(69.8)
	Medium	40W	A	3.5	(88.9)	2	(50.8)	3-1/4	(82.5)
	Medium	60W	A	3.5	(88.9)	2-1/2	(63.5)	3-1/4	(82.5)
	Medium	75W	A	3.5	(88.9)	2-7/8	(73.0)	3-1/4	(82.5)
	Medium	100W	A	4	(101.6)	3-1/2	(88.9)	3-1/4	(82.5)
	Medium	150W	A	4.5	(114.3)	4-3/4	(120.7)	3-1/4	(82.5)
	Candelabra	25W	B	3	(76.2)	1-5/8	(41.3)	2	(50.8)
	Candelabra	40W	B	3.5	(88.9)	2	(50.8)	2	(50.8)
	Candelabra	60W	B	3.5	(88.9)	2-1/2	(63.5)	2	(50.8)

### Terminology

\*CD= Cylinder Diameter

The minimum diameter of a cylinder, as determined by the bulb wattage in the Chart, which must be able to pass through the openings in the top and bottom of the shade.

\*\*r = Critical Radius

The critical radius is the minimum allowable horizontal distance from the center point of the bulb filament to either side of the shade (see diagram).