

INSTALLATION INSTRUCTIONS

Model # 72135-66

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARING FOR INSTALLATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
3. Pull black, white and ground wire out of base cup (D).

CONNECTING THE WIRES (Fig. 2)

4. While supporting the fixture, connect electrical wires as shown in (Fig.2). Making sure that all wire connectors (F) are secured. If your post has a ground wire (green or bare copper), connect fixture ground wire to it. If not, consult your electrician for proper grounding.
5. Tuck wire connectors carefully inside base cup (G) (Not included).


COMPLETING THE INSTALLATION (Fig. 1)

6. Remove screws (C) to separate cover (A) from fixture body (H).
7. Align base cup (I) with post (G) and secure with screws (J).
8. Install glass panels (B) into the holder of fixture body (H) and secure with frame tabs (E) top and bottom.
9. Install (4) four candelabra base bulbs (D) up to 60 watts or CFL or LED equivalent (not included) in accordance with the fixture specification. **—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
10. Align cover (A) onto fixture body (H) and secure with screws (C).

Your installation is now complete. Return power and test the fixture.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig. 1

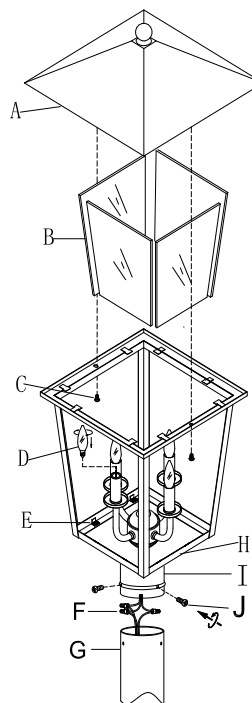

Glass# G72133-1

Candle Cover# CCV21070P-66

Fig. 2

