


ASSEMBLY INSTRUCTIONS (English)

SKU: 46910
SKU: 49276

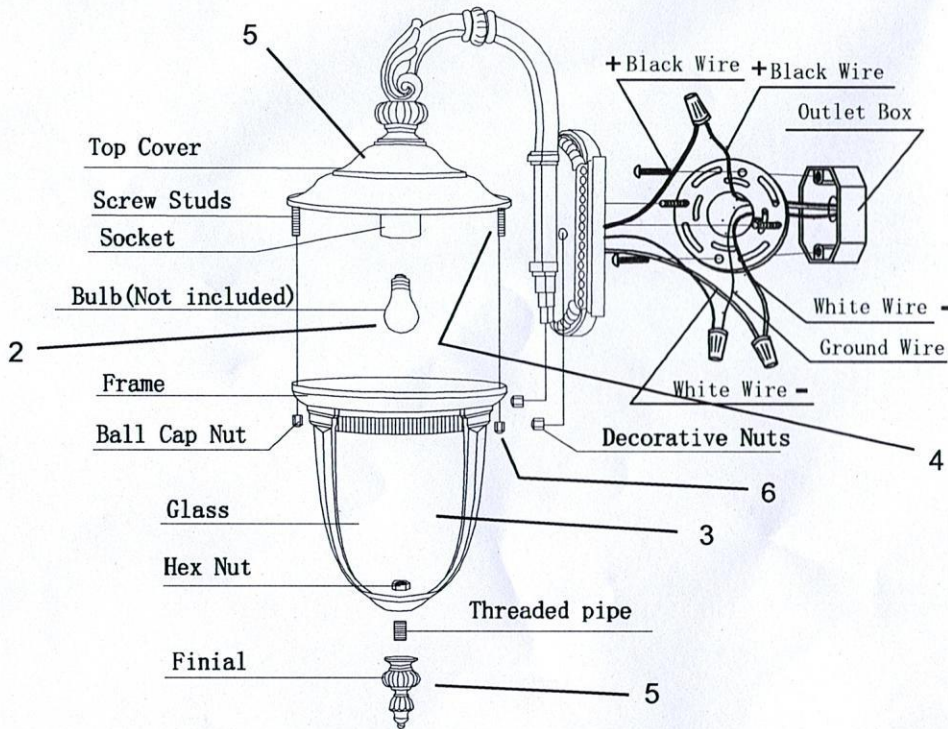

IMPORTANT

--ALL ELECTRICAL CONNECTION MUST BE IN ACCORDANCE WITH LOCAL CODES, ORDINANCES OR NATIONAL ELECTRICAL CODES. IF YOU ARE UNFAMILIAR WITH QUALIFIED ELEDTRICIAN.
--BEFORE STARTING INSTALLATION, DISCONNECT THE POWER BY TURNING OFF THE CIRCUIT BREAKER OR BY REMOVING THE FUSE AT THE FUSE BOX.
--IMPORTANT SAFEGUARDS AND INSTRUCTIONS APPEARING ON THIS SHEET ARE NOT MEANT TO COVER ALL POSSIBLE CONDITIONS AND SITUATIONS, AND CARE ARE FACTORS WHICH MUST BE SUPPLIED BY THE PERSON(S) CARING FOR AND OPERATION THE UNIT.

1. Carefully unpack and identify all parts.
2. Screw the bulb in the socket.
3. Put the glass in the frame
4. Fix the thread onto the cover.
5. Screw the finial on the bottom of the frame and put the cover on the frame.
6. Screw the top cover with two decorative nuts.
7. Make wire connection: Refer to chart below for correct connection. Wire supply wires to fixture wires accordingly.

Connect Black or Supply Wire to:	Connect White Supply Wire to :
Black Fixtuner Wire or	White Fixture Wire or
*parallel cord (Round & smooth)	*parallel cord (Square & Ridged)
Clear, Brown, Glod or Black Without tracer	Clear, Brown, Glod or Black Without tracer
Insulated wire (Other than green) With copper Conductor	Insulated wire (Other than green)

Note: when parallel wire (SPT1&SPT2), is used. One wire is square shaped or ridged and the other wire will be round is smooth (See Illustration)

