

ASSEMBLY AND INSTALLATION INSTRUCTIONS



AC11121

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

Installation Steps

NOTE: Do not install on ceilings with a Radiant Ceiling Heating System.

1. Carefully unpack your new Fixture and lay out all the parts on a clear surface. Take care not to loose any small parts necessary for installation .
2. Shut off power at the Fuse Box or Circuit Breaker Box. Remove the old fixture from ceiling, including the Circular Strap.
3. Thread Pole -1 into Nipple until tight.
4. Thread Pole -2 into Pole-1 until tight.
5. Thread Pole -3 into Pole-2 until tight.
6. Thread Pole -4 into Pole-3 until tight.
7. The Circular Strap contains several pairs of threaded holes, Find the pair of holes that match the hole spacing in your Fixture Canopy and thread the two Stud part Way into the Circular Strap, adjust the length as you measured, and then tighten with the Small Nut.
8. Attach the Circular Strap to the Outlet Box using the two Screws from the Outlet Box. The side of the Circular Strap marked "GND" must face out.
9. While holding the Canopy toward the ceiling, connect the electrical wires as follows. Connect the Supply wire to the Fixture wire. Make sure all Wire Connector are secured. You may wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper) connects fixtures Ground Wire to it. Otherwise connect Fixture's Ground Wire directly to the Circular Strap using the Green Screw provided. Tuck the wire connections neatly into the Outlet Box as you hold the Canopy assembly toward the Ceiling.
10. Place the fixture Canopy over two Studs so they protrude through the holes in the Canopy, thread the Ball nuts onto the Stud and continue turning until the Fixture is snug against the Ceiling.
11. Install the lighting bulb in accordance with the fixture's. Specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
12. Turn on the power at fuse or Circuit Box. **NOTE:** All parts must be used as indicated, and the physical integrity must be maintained to insure ETL/CETL listing of this fixture.

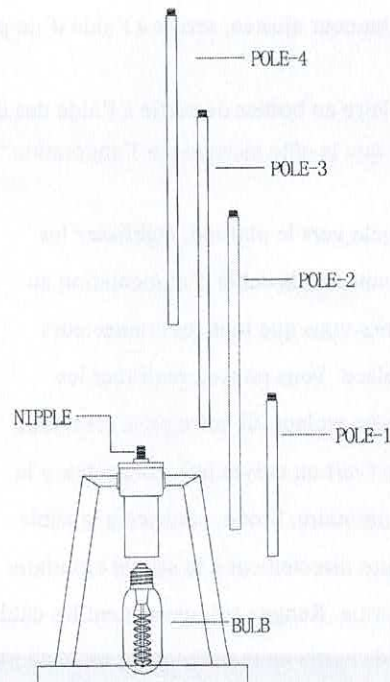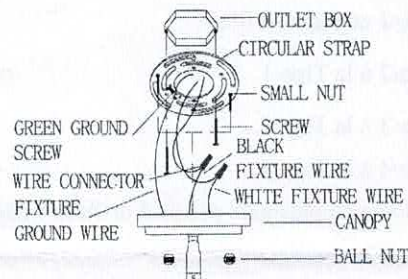

INSTALLATION & ASSEMBLY INSTRUCTIONS

Attention:

Before assembling your lighting fixture, please read the following instructions. If you feel you do not have sufficient electrical experience, refer to a do-it-yourself wiring handbook or have your fixture installed by a qualified licensed electrician.

GENERAL

1. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with methods of installing electrical wiring, secure the services of a qualified licensed electrician.
3. These fixtures are intended for mounting to a standard 4" x 2 ¼" deep metal octagon outlet box. The box must be directly supported by the building structure.
4. Before commencing with the installation, **disconnect the power by turning off the circuit breaker** or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE:

The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur. It must be understood that common sense, caution and care, are factors that cannot be built into any product. The person(s) caring for and operating the fixture must supply these factors.

CAUTION:

- **Ensure that the Fitting is Cool and Switched off, Before Changing Bulb.**
- **Do Not use Bulbs Exceeding Maximum Wattage, As Per Caution Label.**